

Light-Pak ELPSM2

emergency lighting system

Cl. I, Div. 1, Groups B, C, D
Cl. II, Div. 1, Groups E, F, G

NEMA 3R

7L

Applications:

Light-Pak™ ELPSM2 emergency lighting systems are used:

- To provide safe, reliable illumination for egress areas during failure or interruption of power to the normal lighting system
- To illuminate machinery or panels during a loss of AC power
- In areas where flammable gases and vapors may become present due to abnormal, unusual or accidental conditions
- In manufacturing plants, refineries, petrochemical and chemical plants, waste and sewage treatment facilities, oil terminals, food processing facilities, breweries and other industrial manufacturing or process industry facilities subject to wet or corrosive conditions
- Where moisture, dirt, dust or corrosion will limit the life and reliability of ordinary emergency lighting systems
- Where required by the National Electrical Code, the Life Safety Code or other applicable codes
- In outdoor applications

Features:

- Copper-free aluminum enclosed, gasketed housing – provides corrosion protection in the most extreme environments
- Durable LED lamp head assemblies – provide protection against water ingress, corrosion and impact
- High temperature rated nickel cadmium battery for reliable operation up to +40°C ambient
- Reduced maintenance costs – self-test, monitoring and diagnostics reduce costly maintenance checks
- Remote mountable lamp heads – lamp heads can be mounted independently from the enclosure, allowing you to focus light where you need it
- Solid state battery charger – ensures long life and reliable battery operation; prevents deep discharge by automatically disconnecting the battery from the luminaire

Certifications and compliances:

NEC/CEC:

- Class I, Division 1, Groups B, C, D
- Class II, Division 1, Groups E, F, G
- NEMA 3R

UL standards:

- UL50E; UL844; UL924; UL1203; UL1598; UL8750

CSA standards:

- CSA C22.2 No. 141-10
- CSA C22.2 No. 137

NFPA:

- Life Safety Code NFPA101® - Section 5-9 (Emergency Lighting)


Standard materials:

- Power supply and remote luminaire enclosure – epoxy powder coated copper-free aluminum
- LED lamp head assembly – epoxy powder coated aluminum
- Exterior hardware – stainless steel
- Cover gasket – neoprene

Temperature performance data:

Cat. #	Class I & II, Division 1
ELPSM2 (all models)	T5

Note: Ambient temperature at which the emergency system is rated is 0°C to +40°C. Operation at temperatures outside this range will affect the battery life and/or charging performance.

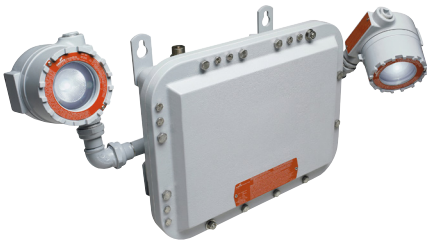

Electrical ratings:

- **Power supply:**
Input – 120-277 VAC, 50 or 60 Hz; 4W maximum
Output – 12 VDC
- **LED luminaire heads:**
Voltage – 12 VDC
Lamp type – 2W LED, 4W maximum
Maximum two lamp heads

Options:

Description	Suffix
• Key operated external battery disconnect switch.....	S794
• Keyless external battery disconnect switch.....	S854

Accessories (ordered separately):

Description	Cat. #
• Replacement charging board and battery kit.....	ELPSM2 K50

Photometrics:

- Refer to www.eaton.com (under the Resources tab of each product family) for specific photometric IES files

Light-Pak ELPSM2
emergency lighting system

Cl. I, Div. 1, Groups B, C, D
Cl. II, Div. 1, Groups E, F, G

NEMA 3R

7L

Ordering information:

Part number example
ELPSM22EXSGBGN S794

ELPSM2

2

EXS

GB

GN

S794



Series
ELPSM2 Class I, Division 1
emergency luminaire

No. of integral luminaires
0 No integral luminaires
2^A Two integral luminaires

Integral exit sign
BLANK No integral exit sign
EXS^B Single sided
integral exit sign
EXD^B Double sided
integral exit sign
Exit sign luminaire^C
BLANK Groups C, D exit
sign
GB Groups B, C, D exit
sign

**External battery
disconnect switch**
BLANK No external battery
disconnect switch
S794 Key operated external
battery disconnect
switch
S854 Keyless external
battery disconnect
switch
Exit sign letter color^C
BLANK Red lettering
GN Green lettering

Dimensions (in inches):

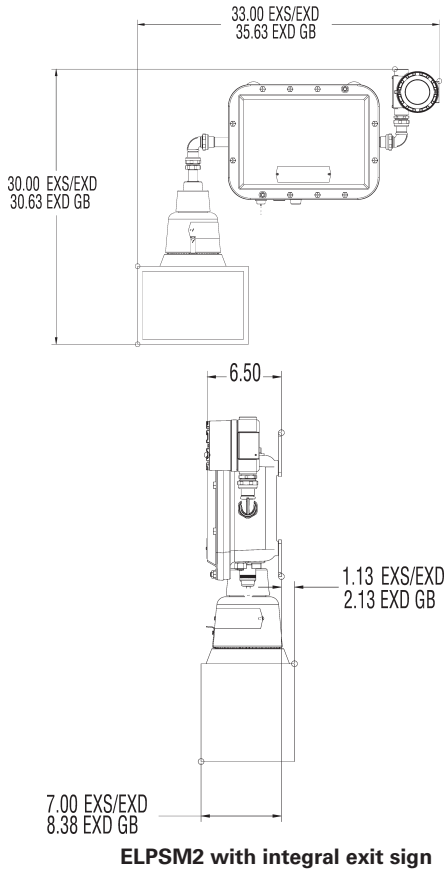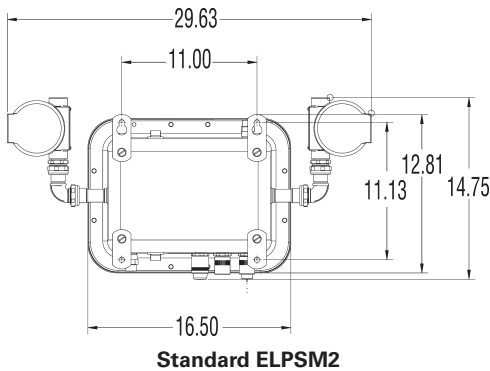

^ATwo luminaires comprised of either two lamp heads or one lamp head plus one exit sign lamp.
^BNot UL or cUL Listed.
^COnly applicable to assembly with EXS or EXD integral exit sign.