


LED UNDER CABINET

LEDUR & LEDUR TW 120V EDGE-LIT UNDER CABINET

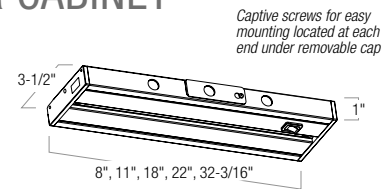

The LEDUR series of undercabinet lighting is now available in Tunable White version that allows the end user to select between 2700K, 3000K or 3500K at time of installation with a three-position switch. LEDUR's built in LED driver, captive mounting screws, and large knockout plate in the back makes LEDUR easy to install. A heavily frosted lens diffuses the LED image and softens the light output. Available in multiple sizes, two finishes, tunable white or designated CCT at 350+ Lumens per foot and 90+ CRI.

LEDUR LED UNDER CABINET

SERIES / LENGTH / WATTAGE	COLOR TEMP	FINISH
NUD-8808 8" / 4.5W	/27 2700K	BZ Bronze
NUD-8811 11" / 6.7W	/30 3000K	WH White
NUD-8818 18" / 11W	/40 4000K	
NUD-8822 22" / 12W	4000K available in White finish only	
NUD-8832 32" / 16W		

Example: **NUD-8811/30WH**- 11" LEDUR Under Cabinet, 3000K, White finish

LEDUR TW TUNABLE WHITE LED UNDER CABINET

SERIES / LENGTH / WATTAGE	COLOR TEMP	FINISH
NUDTW-8808 8" / 3.8W	(blank) Tunable White <i>(Built-in switch changes between 2700K, 3000K or 3500K)</i>	/BZ Bronze
NUDTW-8811 11" / 5.6W		/WH White
NUDTW-8818 18" / 10W		
NUDTW-8822 22" / 10W		
NUDTW-8832 32" / 15W		

Example: **NUDTW-8811/BZ**- 11" LEDUR TW Under Cabinet, Tunable White, Bronze finish

FEATURES:

- Designated CCT or Tunable White switch
- 350+ Lumens per foot
- 7 Watts average per foot
- 90+ CRI
- Frosted Lens / No Diode Image
- Dimmable
- Built-in On/Off switch
- White or Bronze finishes
- Less than 1" in depth
- Each unit can be hardwired with Romex feed
- Each unit includes Romex™ Connector
- Easy to mount with captive screws
- Linkable up to 400 Watts



LEDUR ACCESSORIES



NUD Series Junction Box

NUA-802 B or W

Hardwire box used to power NUD Series using NUA-806/812/824/872 Jumper Cables and NUA-804 Hardwire Connector. L: 4" W: 1-3/4" H: 1"

Note: LEDUR NUD-88 Series can be direct wired into fixture.



NUD Series Hardwire Connector

NUA-804 B or W

3-Wire grounded connector/cable used to hardwire fixture to NUA-802.

NUD Series 72" Cord & Plug

NUA-805 B or W

Converts fixture from hardwire to direct plug-in units using connector pins on either end of fixture. Grounded plug.



Jumper Cable

NUA-806 6" B or W

NUA-812 12" B or W

NUA-824 24" B or W

NUA-872 72" B or W

Used to join fixtures together or to NUA-802.



End to End Connector

NUA-803

Use to join fixtures seamlessly together. 3-Wire grounded connector (one included with fixture).