PIGTAIL:
WIRE: #12 AWG STRANDED, 10-1/2" LONG, GREEN INSULATED, U.L. LISTED, 600 VOLT MAX;
EXTRA-GRIP RING TERMINAL, 16/12 AWG BRASS;
#10-32 X 3/8" GROUND SCREW W/COMBO HEX WASHER HEAD (SLOTTED, #2 PHILLIPS AND ROBERTSON)

REVISIONS			
REV.	DATE	DESCRIPTION	BY:
-	08/08/18	INITIAL RELEASE OF DRAWING	RMV

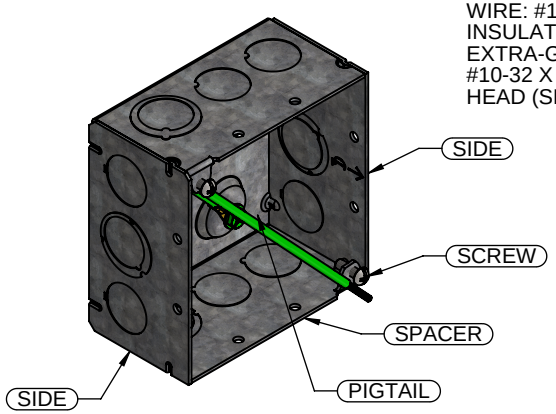

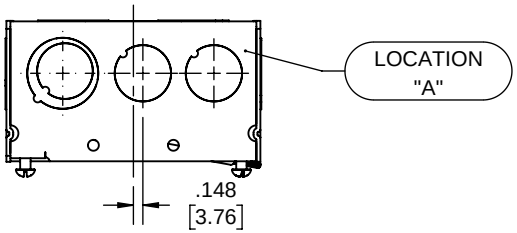

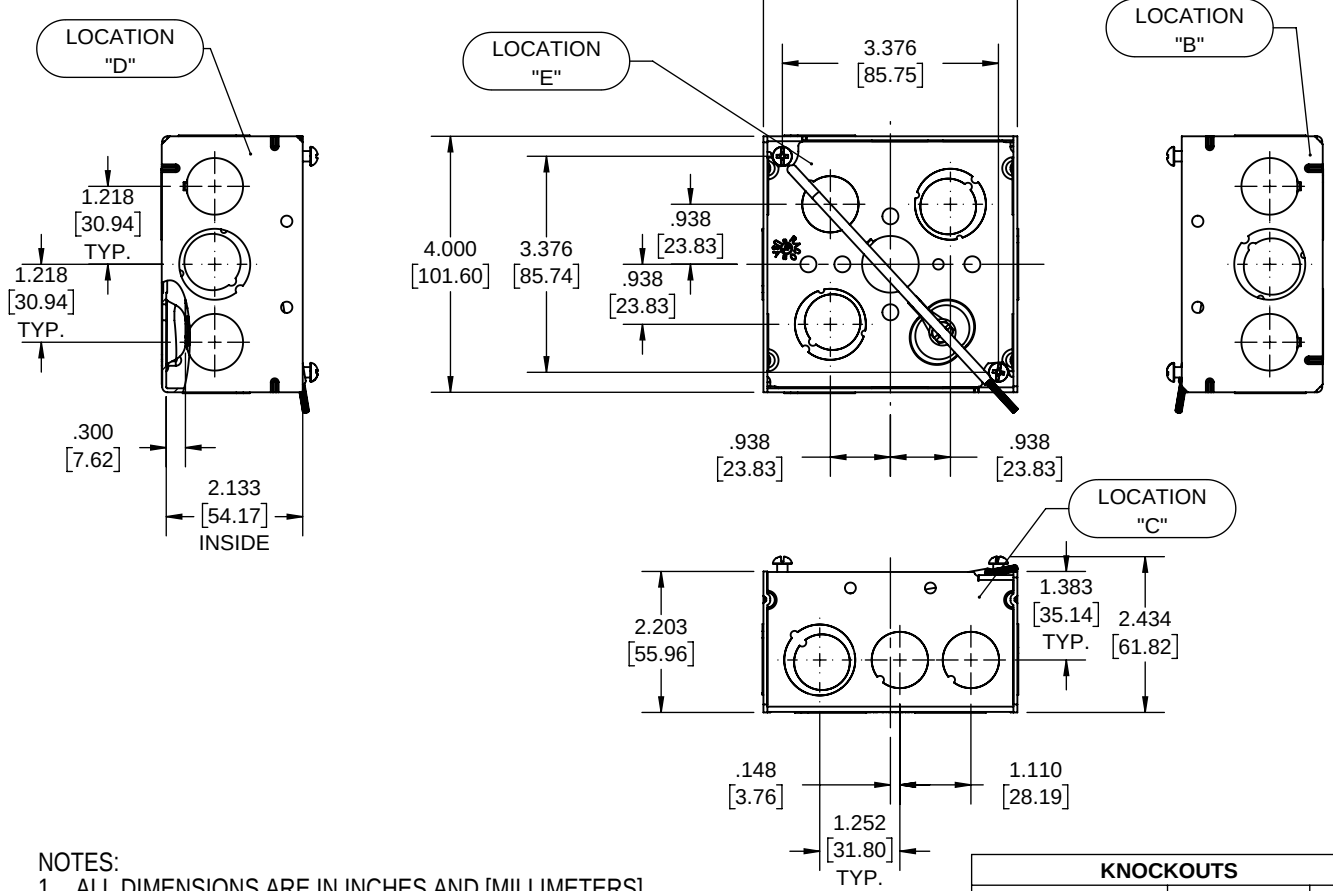

PIGTAIL	INSULATED STRANDED COPPER	N/A
FASTENERS	STEEL	GALVANIZED
SIDE	STEEL	GALVANIZED
SPACER	STEEL	GALVANIZED
DESCRIPTION	**MATERIAL**	**FINISH**

LIST OF PARTS

THE DESIGN AND DIMENSIONS OF THE PRODUCT SHOWN ON THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT NOTICE

TITLE:
ASSEMBLY 4" SQ x 2-1/8" DEEP BOX WITH GROUND WIRE

NOTES:
1. ALL DIMENSIONS ARE IN INCHES AND [MILLIMETERS]
2. BOX VOLUME: 30.3 IN³ [496.5 CM³]
3. cULus LISTED

KNOCKOUTS		
TRADE SIZE	LOCATION	QTY.
(1/2"-3/4") TKO†	A, B, C, D	1
1/2" KO	A, B, C, D, E	2
(1/2"-3/4") TKO†	E	2

TOLERANCE UNLESS OTHERWISE SPECIFIED
.XX DECIMAL ± .015
.XXX DECIMAL ± .005
ANGLE ± 2°

RACO

DRAWN BY:	RMV	SCALE:	SIZE:
APP. BY:	N.S.		A
DATE:	08-08-18	1:3	

FILE NO.: 232SM CUS

DIMENSION SHEET FOR CAT. NO. 232SM

11in*17in