


Hub Type

Images

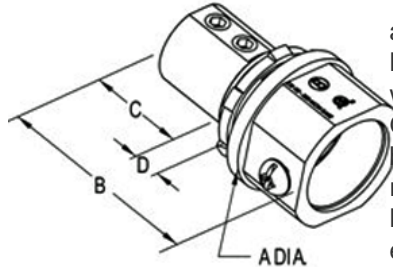

[Download Photo Image](#)

[Download Dimensional Image](#)

Dimension A in Inches: 2.332
Dimension B in Inches: 3.090
Dimension C in Inches: 1.120
Dimension D in Inches: .565

Application

The MCH-125 is listed for use in wet and dry locations as a connector for rigid metal conduit or EMT with a Bridgeport Fittings connector. The MCH-125 will provide a wet locations seal. Rigid Metallic raceways which contain Ground Electrode Conductors (G.E.C.) are required to be bonded at the enclosure and where the conductor exits the raceway for attachment to the ground electrode. The MCH-125 can be used in both applications: at the enclosure and at the end of the bonding conductor raceway. Also Suitable for Direct Burial. Conductor Range 3/0 to 400 MCM Str. CU. Patented.

Product Information

Material: Stainless Steel

Certifications & Codes:

Federal
Specification A-A-50553A
Number:
NEMA
Standard: FB-1
UL File
Number: Listed ETL under Bridgeport Fittings:
MCH-125. Conforms to UL 467 and
CSA C22.2 No. 18.3
UL
Standard: 467
UNSPSC: 39121613
Patent
Number: 8,410,378; D703,519

Catalog ID: MCH-125

UPC Number: 78174702347

Description: 1 1/4" Stainless Steel Alloy grounding fitting with stainless steel set screws and Stainless steel locknut Buna N sealing ring. NPT threads

Application: The MCH-125 is listed for use in wet and dry locations as a connector for rigid metal conduit or EMT with a Bridgeport Fittings connector. The MCH-125 will provide a wet locations seal. Rigid Metallic raceways which contain Ground Electrode Conductors (G.E.C.) are required to be bonded at the enclosure and where the conductor exits the raceway for attachment to the ground electrode. The MCH-125 can be used in both applications: at the enclosure and at the end of the bonding conductor raceway. Also Suitable for Direct Burial. Conductor Range 3/0 to 400 MCM Str. CU. Patented.

Trade Size: 1 1/4"

Std Pkg Qty: 10

Unit Qty: 1