THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NUMBER	WIRE SIZE AWG [mm²]	STUD SIZE		HOUSING COLOR	DIMENSIONS - in. [mm]						WIRE STRIP LENGTH in [mm] +1/32 [0,8] -0	TOOLS
		ENGLISH	METRIC		L± .04 [1,1]	B	W± .01 [0,3]	C± .01 [0,3]	M± .02 [0,6]	H +.01 [0,3] -0		
EV14-6FNB	#16-14 [1.5-2.5]	#6	M3.5	BLUE	.83 [21.0]	.165 [4.2]	.22 [5.7]	.26 [6.5]	.39 [10.0]	0.146 [3.7]	9/32" [6.8]	KST2000A
EV14-8FNB	#16-14 [1.5-2.5]	#8	M4		.83 [21.0]	.165 [4.2]	.28 [7.2]	.26 [6.5]	.39 [10.0]	0.169 [4.3]		
EV14-10FNB	#16-14 [1.5-2.5]	#10	M5		.83 [21.0]	.165 [4.2]	.31 [7.9]	.26 [6.5]	.39 [10.0]	0.209 [5.3]		
EV10-8FNB	#12-10 [4.0-6.0]	#8	M4	YELLOW	1.00 [25.5]	.240 [6.1]	.33 [8.3]	.28 [7.0]	.51 [13.0]	0.169 [4.3]	11/32" [8.8]	
EV10-10FNB	#12-10 [4.0-6.0]	#10	M5		1.00 [25.5]	.240 [6.1]	.35 [9.0]	.28 [7.0]	.51 [13.0]	0.209 [5.3]		

NOTES:

1. UL LISTED FOR:
   A. STRANDED COPPER WIRE ONLY
   B. 221°F (105°C) MAX TEMP RATING
   C. 600V MAX VOLTAGE RATING

2. MATERIAL:
   A. STAMPING - COPPER, TIN PLATED:
      EV14 - .031" [0,8] THICK
      EV10 - .039" [1,0] THICK
   B. HOUSING - VINYL

3. SEE WWW.PANDUIT.COM FOR PACKAGE QUANTITIES

4. DIMENSIONS IN BRACKETS ARE METRIC EQUIVALENT

c UL us
LISTED
20U0
E52164

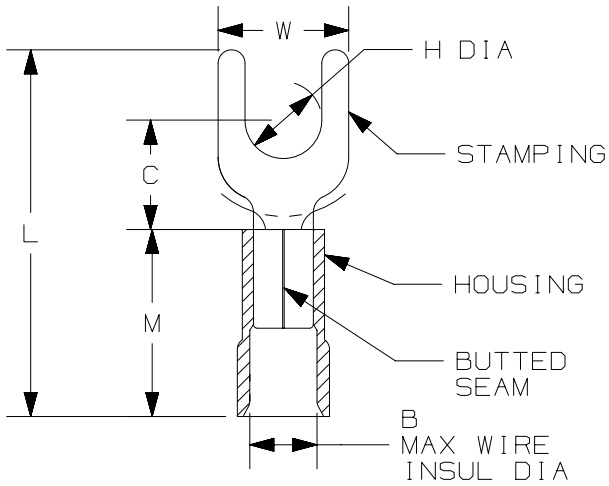

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
00	2/18	JHNU	TMR	RGB	DRAWING RELEASED	00123SS

TITLE
STRONGHOLD NARROW FORK TERMINALS, VINYL INSULATED, BUTTED SEAM #16-10 AWG
CUSTOMER DRAWING

ITEM REVISION NAME: 00123SSL/00

DATASET FILE NAME: 00123SSL_DC/00

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]
.X ± .XXX ±
.XX ± ANGLES ±

THIRD ANGLE PROJECTION

MATERIAL: SEE NOTES

DRAWING NUMBER: 00123SSL-DC

DRAWN BY	DATE	CHK	SCALE	SHEET 1 OF 1	SIZE
FES	-	FES	N.T.S.		A

D10100DA/12