

# CS8369



UPC Code: 07847732641

Country Of Origin: Mexico

NEMA:  
Non-NEMA



## Brand Features

Leviton Black &White 50Amp Non-NEMA Locking devices are designed for faster wiring and longer life. Made from tough, impact-resistant nylon housings and metal shrouds, these plugs, connectors, receptacles and flanged inlets are designed for rugged environments like construction sites, commercial shipyards and convention centers.

## Item Description

50Amp, 3-Phase 250V AC, Non-NEMA, 3P, 4W, Black &White Locking Flush Mount Receptacle, Industrial Grade, Grounding, California-Style(CS) – BLACK

## Technical Information

### Electrical Specifications

**Grounding:** Grounding

**Amperage:** 50 A

**Voltage:** 250 VAC

**Pole:** 3

**Wire:** 4

**Dielectric Voltage Withstand:** 2000V minimum per UL 498

**Maximum Working Voltage:** 3-Phase 250V as rated

**Current Interrupting:** Certified for current interrupting at full rated current

**Temperature Rise:** Max 30°C temp rise at full-rated current after 150 cycles of OL at 150% rated DC current

**Phase:** 3-Phase

### Environmental Specifications

**Flammability:** Rated V-0 per UL 94

**Operating Temperature:** -40°C to 75°C

**Environment:** Dry

### Material Specifications

**Face Module:** Reinforced Nylon

**Body & Contract Carrier:** Reinforced Nylon

**Shroud:** .062inch thick Nickel Plated Steel

**Back Cover:** Reinforced Nylon

**Mounting Strap:** Single piece SS 302/304

**Mounting Screws:** SS 302/304

**Assembly Rivets:** SS 302/304

**Center Pin:** SS 302/304

**Connector Contact - Spring:** 0.041inch thick Brass

**Connector Contact - Binding Plate:** 0.100inch thick Brass

**Contact Rivet:** Brass

**Box Terminal:** 0.062inch thick Copper

**Terminal Set Screw:** SS 302/304

**Color:** Black

### Mechanical Specifications

**Terminal ID:** X, W, Y, Z and Green for ground

**Terminal Accom.:** #10min to #6max AWG Solid or Stranded Wire (Stranded Wire for Ground only)

**Product ID:** Ratings and Catalogue No. molded into face

### Product Features

**NEMA:** Non-NEMA

**Color:** Black

**Device Type:** Locking Receptacle

**Brand:** Black and White

### Standards and Certifications



**UL 498:** File E13399

**CSA C22.2 No. 42:** File 152105

**NOM:** 057

**RoHS:** Compliant

**Warranty:** Lifetime Limited

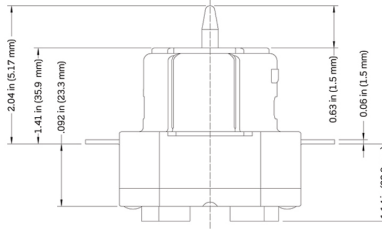

**SPECIFICATION SUBMITTAL**

JOB NAME: <input type="text"/>	CATALOG NUMBERS: <input type="text"/>	
JOB NUMBER: <input type="text"/>	<input type="text"/>	<input type="text"/>

**Leviton Manufacturing Co., Inc.**

201 North Service Road, Melville, NY 11747

Teléfono: +1-800-323-8920 · FAX: +1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.T. Monday-Friday): +1-800-824-3005

**Leviton Manufacturing of Canada, Ltd.**

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-469-7890 ·

FAX: +1-800-824-3005 · [www.leviton.com/canada](http://www.leviton.com/canada)

**Leviton S. de R.L. de C.V.**

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52)5386-

1797 · [www.leviton.com.mx](http://www.leviton.com.mx)

Visit our Website at: [www.leviton.com](http://www.leviton.com)

© 2018 Leviton Manufacturing Co., Inc. Todos los derechos reservados. Subject to change without notice.

**Leviton has a global presence.**

If you would like to know where your local Leviton office is located please go to:

[www.leviton.com/international/contacts/](http://www.leviton.com/international/contacts/)

