



## Technical Specifications (continued)

### Other

#### 5-Year, No-Compromise Warranty:


RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).

#### Compatible Accessories:

DRI-EMB-15S-LV

2-n-1 Driver + Battery Backup

## Dimensions

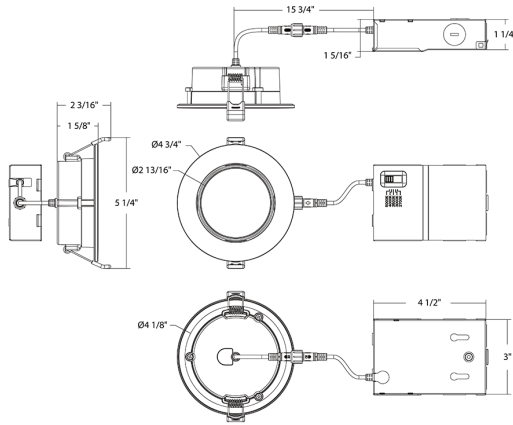

## Features

Shallow baffle trim provides extremely thin depth for shallow ceiling installation

Flexible 360° rotation and 25° tilt for any direction illumination

5 color temperatures in 1 SKU (2700K, 3000K, 3500K, 4000K, 5000K)

No recessed housing or J-box required

IC and airtight rated

## Ordering Matrix

Family	Size	Shape	Wattage	CRI/Color Temp	Driver	Finish	Trim
WFRLA	4	R	8	9FA	120	W	S
	4 = 4" 6 = 6"	R = Round	12 = 12W 8 = 8W	9FA = 90 CRI, CCT Adjustable	120 = 120V	W = White	S = Smooth