


# RETROFIT AND DEDICATED AC OPAL SERIES

## 650LM TO 2000LM SURFACE MOUNT

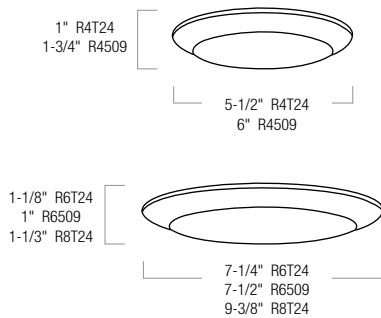

NLOPAC-R4T24 <sup>24</sup> / NLOPAC-R6T24 <sup>24</sup>  
/ NLOPAC-R8T24 <sup>24</sup>

NLOPAC-R4509 / NLOPAC-R6509

### AC OPAL SERIES 4", 6", 8" SURFACE MOUNT

SERIES / LUMENS / WATTAGE	COLOR TEMP	FINISH
<b>NLOPAC-R4509</b> 4" / 650lm / 10.5W	<b>27A</b> 2700K	<b>BZ</b> Bronze <b>NM</b> Natural Metal <b>W</b> White
<b>NLOPAC-R6509</b> 6" / 1050lm / 15W	<b>30A</b> 3000K	
	<b>40A</b> 4000K	
	<b>50A</b> 5000K*	
<sup>24</sup> <b>NLOPAC-R4T24</b> <sup>1</sup> 4" / 850lm / 13W	<b>27</b> 2700K	
<sup>24</sup> <b>NLOPAC-R6T24</b> <sup>1</sup> 6" / 1050lm / 16W	<b>30</b> 3000K	
<sup>24</sup> <b>NLOPAC-R8T24</b> <sup>1</sup> 8" / 2000lm / 30W	<b>40</b> 4000K	

Example: **NLOPAC-R650930AW** - 6" AC Opal Surface Mount, 1050lm / 15W, 3000K, White Finish

\* Available in White finish only <sup>1</sup> Can be used to comply with 2016 Title 24 - part 6 High Efficacy LED light source requirements

The AC Opal LED Series LED fixture is designed to surface mount over a standard junction box. The low profile dimmable luminaire produces even illumination and is cULus listed for wet locations. T24 series can be used to comply with 2016 Title 24 - part 6 High Efficacy LED light source requirements.

#### ELECTRICAL:

Voltage: 120VAC

Lumens / Wattage:

R4509: 650lm / 10.5W, R4T24: 850lm / 13W

R6509: 1050lm / 15W, R6T24: 1050lm / 16W

R8T24: 2000lm / 30W

Color Temperature: 2700K, 3000K, 4000K or 5000K (509 series only)

Color Rendering Index: 90+ CRI

Dimming: Triac / ELV

**CONSTRUCTION:** One piece aluminum die formed housing and trim. Aluminum body dissipates heat and extends life.

**MOUNTING:** AC Opal (no driver) is flat on the back and suitable for installation on most 3" or 4" octagon or round electrical junction boxes. Can be used with 4" (NLOPAC-R4) or 6" (NLOPAC-R6) fire-rated electrical junction boxes.

**LENS:** Nora specified and designed precision molded lens for optimal lumen output and even distribution.

#### ACCESSORIES:

**NLOPAC-56RECKIT:** 6" Opal can be mounted on 5" or 6" recessed housing using optional torsion spring kit.

**NLOPAC-4BKT-2:** Universal bracket for mounting 4" & 6" Opal to 3" or 4" junction boxes. Universal bracket is included with R4509 series.


#### RATINGS:

IC rated when used with a 4" electrical junction box rated for direct contact with insulation. Fire rated when used with a fire rated junction box.

#### LISTING & WARRANTY:

- cULus Listed for Wet Location
- RoHS compliant
- Can be used to comply with 2016 Title 24 - part 6 High Efficacy LED light source requirements
- ENERGY STAR certified
- 5-Year Limited Warranty

### OPTIONAL ACCESSORIES FOR AC OPAL FIXTURE:

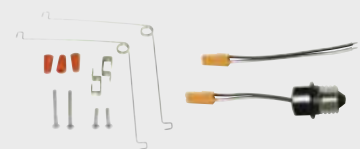

**NLOPAC-56RECKIT**  
**TORSION SPRING AND BRACKET KIT**  
For easy retrofitting with 5" or 6" recessed housing.



**NLOPAC-4BKT-2**  
**UNIVERSAL BRACKET**  
For mounting 4" and 6" Opal to 3" or 4" junction boxes. Universal bracket is included with R4509 series.

