



# PRODUCT OFFERING

---


QUALITY • VALUE • VERSATILITY



**HUBBELL**  
Lighting

# LED FAMILY

The Compass LED Series includes economical energy saving fixtures for use in commercial or light industrial applications. The Compass LED Series is value engineered to reduce costs without sacrificing quality and provides a compact product offering that can be purchased and installed without compromise.

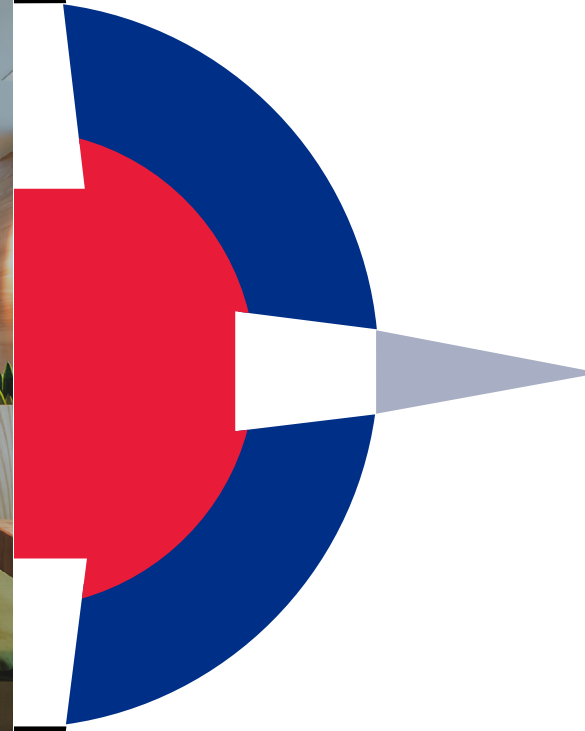

## Quality

- Long-life **LED** operation
- Premium Nickel Cadmium battery
- Low energy consumption

## Value

- Remote capacity option with matching remotes
- Damp and wet location products
- UL924 Listed
- 2 Year Warranty

## Versatility

- Fully adjustable optics
- Bright and even EXIT illumination
- Optimized spacing and coverage
- Indoor and outdoor applications



# Self-Test | Self-Diagnostics



## Self-Testing

15-minute discharge once every 30 days  
90-minute discharge once every year

## Self-Diagnostic

Fault identification for battery, charge, LED integral lamps and remotes  
Self-Testing for 15 minutes monthly, and 90 minutes annually  
Manual testing for 30 second, 15 minutes and 90 minutes

### Manual Testing

Action	Reaction and LED Indication
Push Test Button Once	30 Second test: FLASHING Green
Push Test Button Twice	15 Minute test: Green BLINKING Twice
Push Test Button Three Times	90 Minute test: Green BLINKING 3 Times

### Fault Indication

Fault Description	LED IN
Battery Disconnected	Steady Red
Battery Recharge Failure	Flashing Red
Battery Failure	Blinking Red 2 Times
LED Failure	Blinking Red 3 Times
Lamp Failure	Blinking Red 4 Times
Remote Lamp Failure	Blinking Red 5 Times
Transfer Fault	Blinking Red 6 Times

Included on the following products:



**Combo Exit/Emergency Light**  
CCRS  
CCGS  
CCRRCS  
CCGRCS



**Exit Sign**  
CERS  
CEGS



**Emergency Light**  
CU2S  
CU2RCS



**Square Head  
Emergency Light**  
CU2SQS  
CU2RCSQS



**High Lumen  
Emergency Light**  
CU2HLS  
CU2HLHOS  
CU2HLSDB  
CU2HLHOSDB



# EXITS AND COMBOS

- **LED** Life-cycle of more than 10 years
- Nickel Cadmium battery for UL recognized 90 minute emergency lighting
- Dual-voltage 120 or 277V AC input
- Provided with test switch and AC-On Indicator
- Canopy included



Products with this icon have optional Self-Test/Self-Diagnostics available

## CC

Combination Exit/Unit



- Field selectable red or green LEDs
- White or Black housing made of high impact UL flame rated thermoplastic
- Molded-in template for quick installation
- Lamp-heads are fully adjustable
- Remote capacity or extended run-time option
- Matching indoor or outdoor remote heads CIRS, CIRD, CORD, CORS
- Damp Location Listed



## CE

Exit Sign



- Field selectable red or green LEDs
- Molded-in template for quick installation
- Universal single or double-face
- Remote capacity or extended run-time option
- Matching indoor or outdoor remote heads CIRS, CIRD, CORD, CORS
- Damp Location Listed



## CC SQ

Combination Exit/Unit with Square Heads



- White or Black housing made of high impact UL flame rated thermoplastic
- Molded-in template for quick installation
- Square Heads are fully adjustable
- Remote capacity or extended run-time option
- Matching indoor or outdoor remote heads CIRS, CIRD, CORD, CORS
- Damp Location Listed

## CEW

Wet Location Exit



- Housing and face plate made from impact resistant polycarbonate
- Corrosion resistant and faceplate fully gasketed
- Wall, End or Ceiling Mounted
- Wet location listed (-20°C to 50°C)
- Single or Double Face options

## CEL

Edge-Lit Exit



- Brushed Aluminum Housing with Acrylic Panels
- Panel illumination with red or green letters
- Mirror divider on single and double-face models
- Low input power consumption at 3.72 Watts
- Listed to UL924 Standard

## CCE

Thin Die-Cast Exit



- Brushed aluminum die-cast housing with 6" letters
- Molded-in template for quick installation
- Single or double-face options
- Wall, End or Ceiling Mounted
- 24 hr re-charge
- Damp Location Listed

## CWC

Wet Location Exit/Emergency Light



- Exit face-plate and lamp-head shield made from high impact, UV stable polycarbonate
- LED based exit/emergency light for wall, ceiling or end mounting
- Includes Self-Test/Self-Diagnostics
- Fully adjustable LED lamp-heads at 3.6W each
- Wet Location Listed



# EMERGENCY UNITS

- **LED** Life-cycle of more than 10 years
- Quick Installation
- 90 minute run-time
- Dual-voltage 120 or 277V AC input

## CU2W

Wet Location Emergency Light



- Grey or Black housing
- Corrosion resistant UV stabilized polycarbonate housing
- Remote capacity or extended run-time option
- Fully adjustable lamp-heads
- Water-proof test switch and AC-On indicator
- Wet Location Listed (0°C to 50°C)

## CU2

Emergency Light



- Injection molded, flame retardant thermoplastic housing
- Fully gasketed polycarbonate shield with integral lamp heads
- Dual voltage input 120/277VAC, 60 Hz.
- Maintenance free, sealed lead calcium battery
- UL 924 Listed for damp location

## CU2SQ

Emergency Light with Square Heads



- Housing made of white or black high impact UL flame rated thermoplastic
- Wall or Ceiling Mounted
- Fully adjustable square lamp-heads
- Remote capacity or extended run-time option
- Long Life Nickel Cadmium battery
- Provided with test switch and AC-On indicator

## CU2FO

Fixed Optic LED Emergency Light



- Includes long-life Nickel Cadmium battery for UL recognized 90 minute emergency lighting
- The fixed optic design provides consistent and predictable aiming
- Damp Location Listed 20°C to 30°C (68°F to 86°F)
- Provided with test switch and AC-On indicator
- Wall or Ceiling mount

## CU2HL

High Lumen Emergency Light



- 55' or 110' Spacing
- Injection molded, flame retardant thermoplastic housing
- Designed for high ceiling height applications
- Dual voltage input 120/277VAC, 50/60 Hz.
- Long life Lithium Iron Phosphate battery
- UL 924 Listed for damp location



# REMOTE HEADS

## CIR

Indoor Remote



- Fully adjustable lamp-heads
- Single or double lamp-head remote with base-plate
- Housing made of white or black high impact UL flame rated thermoplastic

## COR

Outdoor Remote



- Fully adjustable lamp-heads
- Single or double lamp-head remote with base
- Fully gasketed for application in wet environment
- Housing made of white or black high impact UL flame rated thermoplastic



# OUTDOOR

- \* Wet location rated
- \* AC-On Indicator and push to test switch

## CUW

Outdoor Emergency Light



- Durable die-cast aluminum housing
- Fully sealed and gasketed design
- Normally-on and emergency operation
- Includes Self-Diagnostic/Self-Test
- Photo-Control standard and Optional heater

## CUSO

Slim AC/Emergency Outdoor Light



- Housing is fully sealed and gasketed, and has an IP65 rating
- Includes self-diagnostic/self-test feature to monitor proper operation
- Includes photo-sensor and Passive Infra-Red sensor for normally-on operation
- 0°C to 50°C Standard Model, -25°C to 50°C with optional heater

## CSWEU2LED

Shielded Wet Location  
Emergency Light



- LED Life-cycle exceeding 10 years
- Quick installation
- Dual-voltage 120 or 277VAC input
- Long-life Nickel Cadmium battery at 3.6VDC for UL recognized 90 minute emergency lighting
- Wet Location Listed for 10°C to 40°C (50°F-104°F)
- External Push-to-Test switch
- Wall or Ceiling Mount

## CU2SO

Shielded Outdoor LED  
Emergency Light



- Includes long-life Nickel Cadmium battery for UL recognized 90 minute emergency lighting
- Wet Location Listed 0°C to 40°C (32°F to 104°F)
- Includes test switch and AC-On indicator

# INTERNATIONAL

- Meets international input voltage installation
- Universal single or double face plates

## RME

Running Man Exit Sign



- International Running Man Symbol
- Durable, powder coated 20 gauge steel housing
- Includes face-plates for single or double face
- Includes long-life 4.8VDC Nickel Cadmium battery
- AC, Emergency and Self-Diagnostic models available
- Dual 120/347VAC input, 50/60 Hz

## CSR

International SALIDA Exit



- Meets international input voltage installation
- Molded-in template for Quick Installation
- Universal single or double face SALIDA panel
- Optional long-life 4.8V Nickel Cadmium battery for 90 minute emergency lighting
- Provided with test switch and AC-On indicator





**HUBBELL**  
Lighting

ARCHITECTURAL AREA LIGHTING

BEACON PRODUCTS

COLUMBIA LIGHTING

COMPASS

DUAL-LITE

HUBBELL CONTROL SOLUTIONS

HUBBELL OUTDOOR LIGHTING

KIM LIGHTING

KURT VERSEN

LITECONTROL

PRESCOLITE



701 Millennium Blvd. Greenville, SC 29607  
Tel 864.678.1000

[www.compasslightingproducts.com](http://www.compasslightingproducts.com)

COMP0012 07/21

© 2021 Compass, a division of Hubbell Lighting, Inc. All rights reserved. Please refer to online specifications for most up-to-date content as specifications are subject to change without notice.

